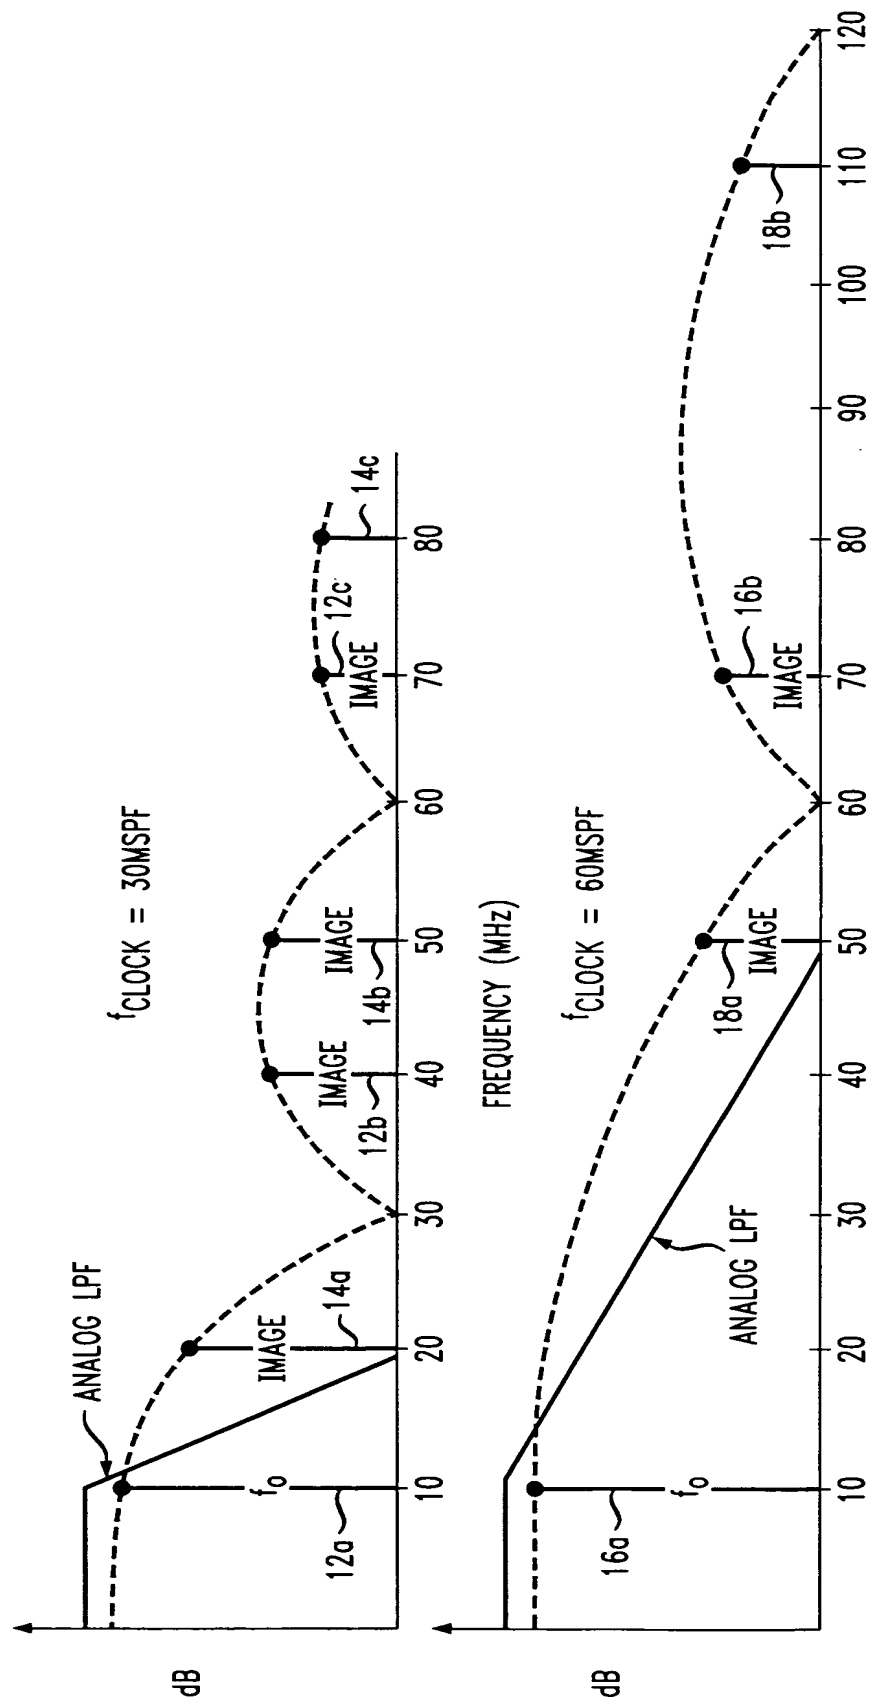




FIG. 1

ANALOG FILTER REQUIREMENTS FOR $f_o = 10\text{MHz}$:

$f_c = 30\text{MSPS}$ AND $f_c = 60\text{MSPS}$






FIG. 2a

20


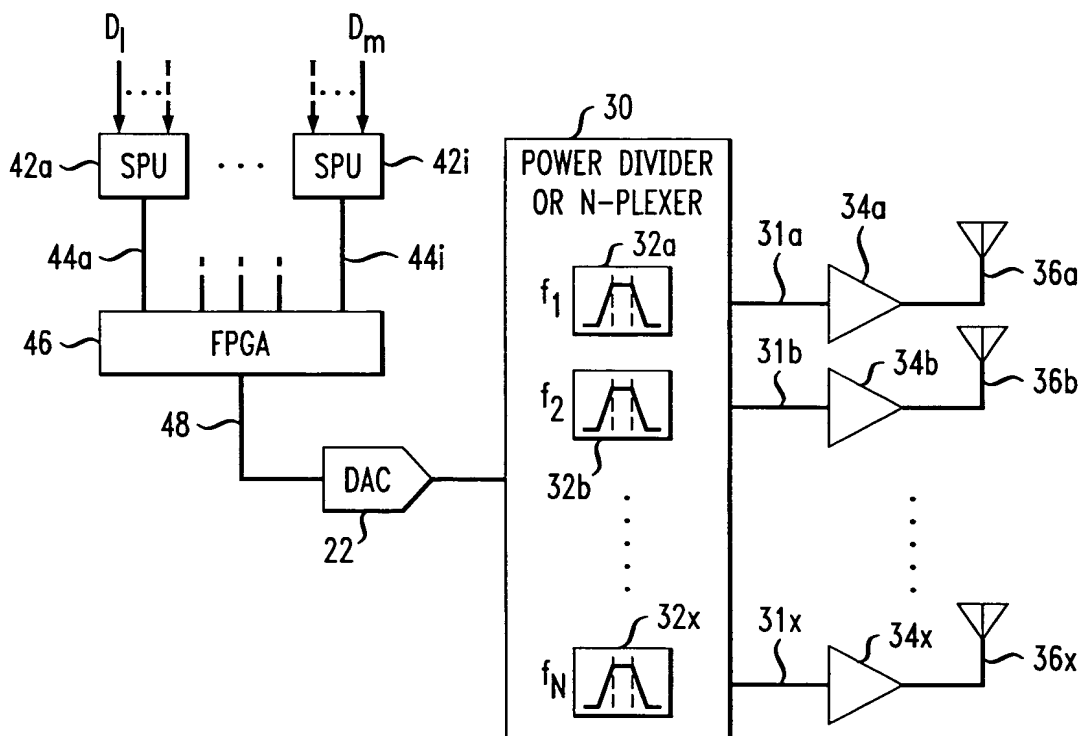


FIG. 2b

20




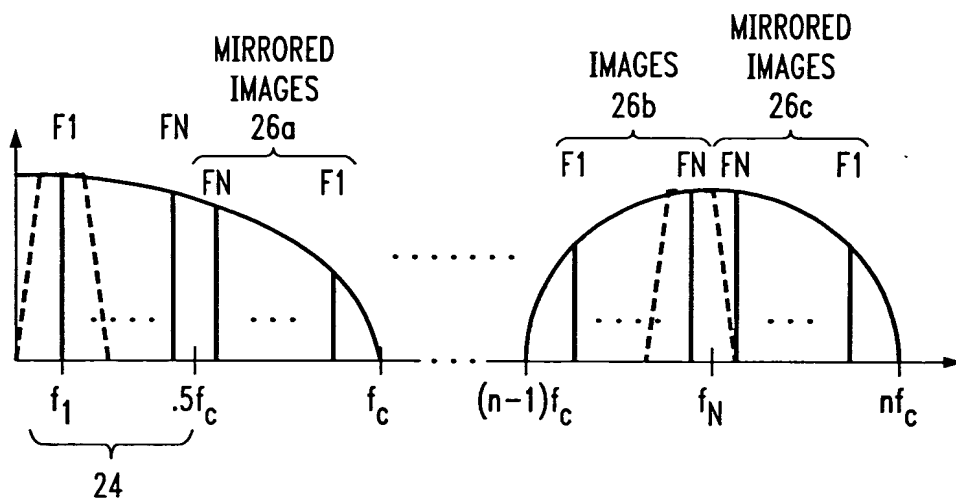

Digital Transmitter System And Method
J. A. Garceran 2-12-20
Serial No.: 09/784.846
REPLACEMENT SHEET

3/8

FIG. 3

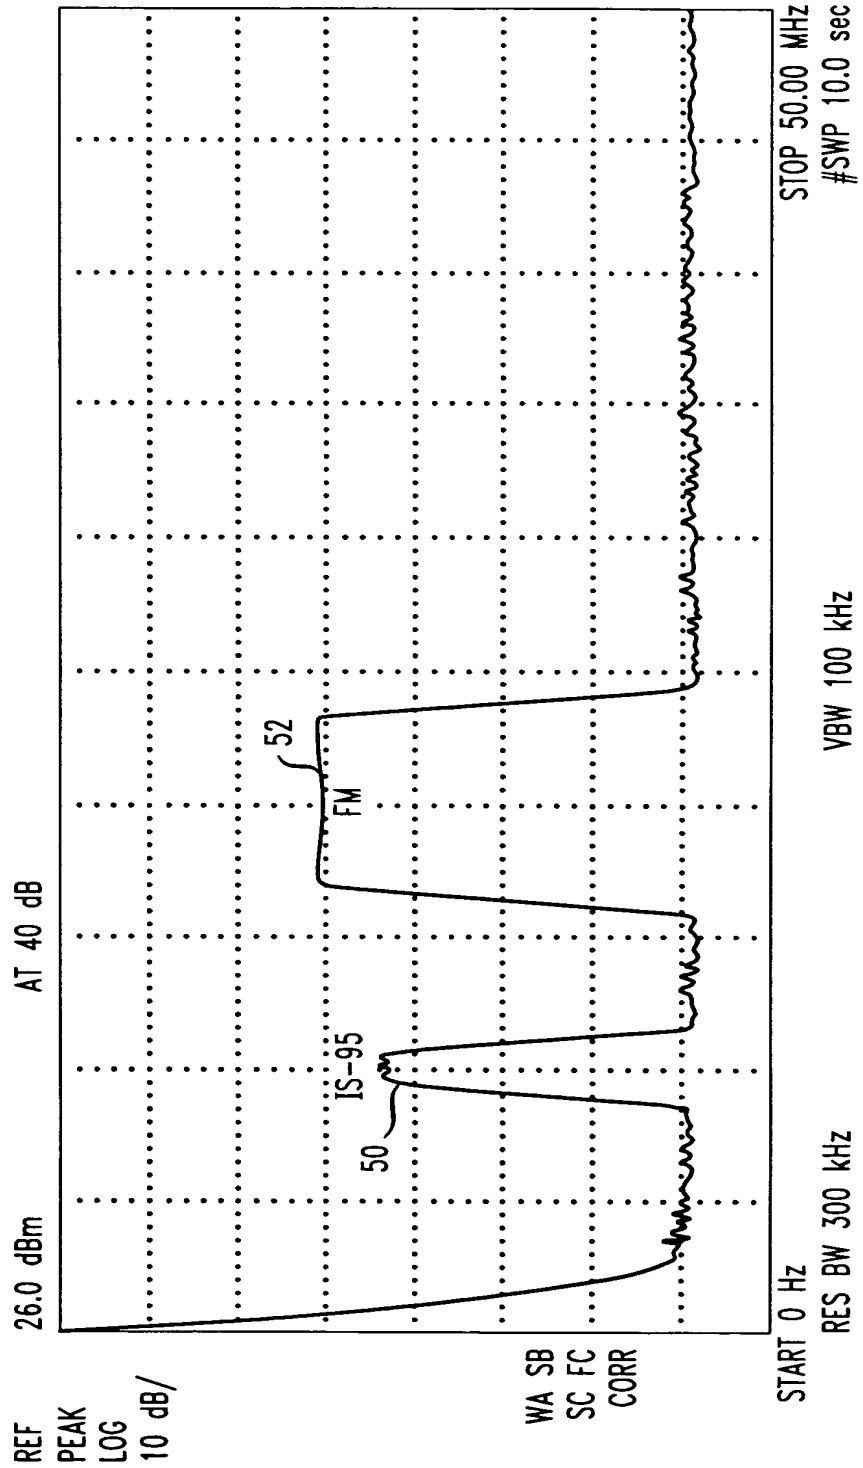



4/10

FIG. 4

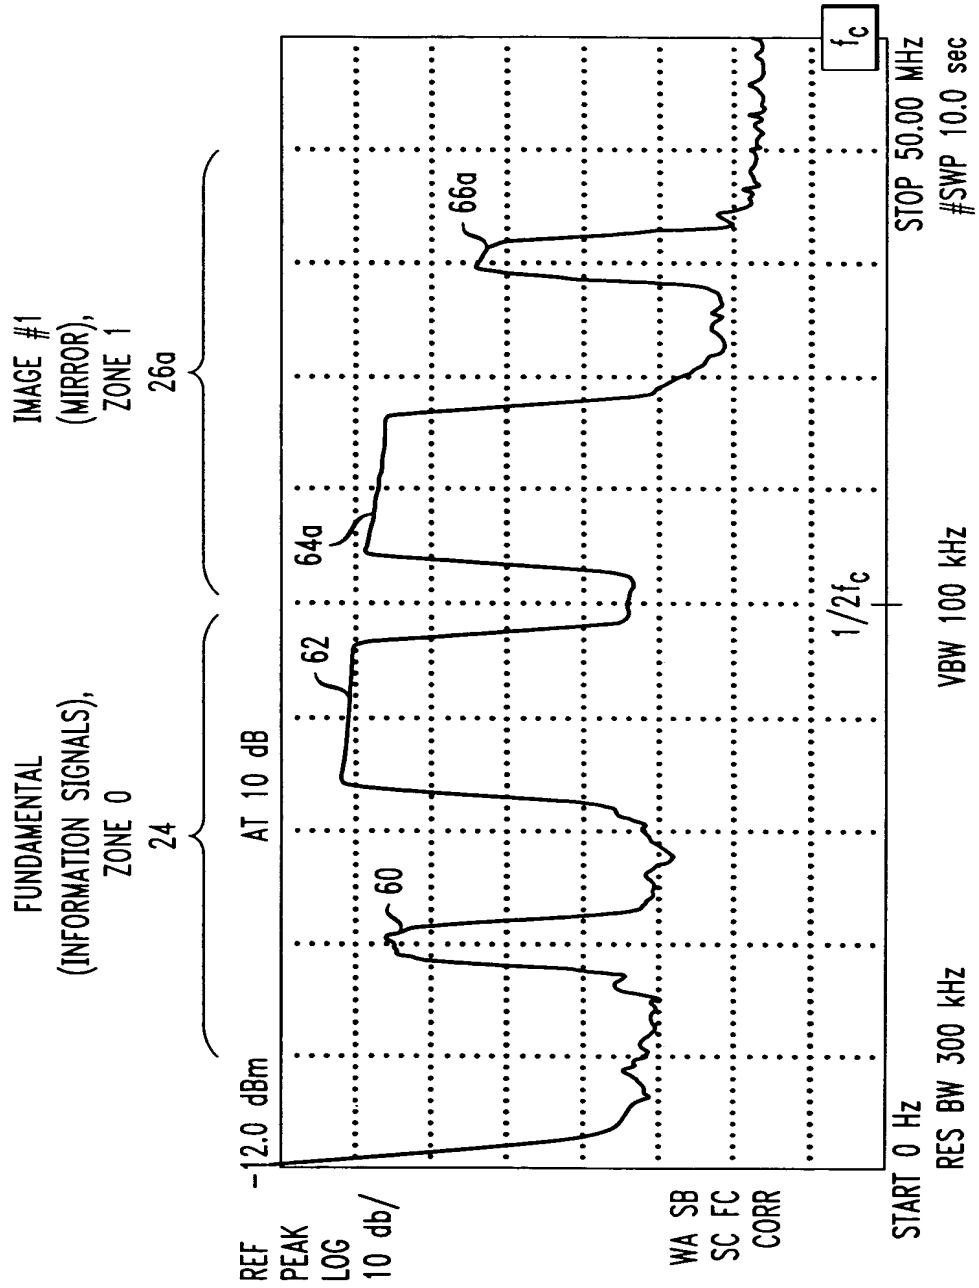




FIG. 5

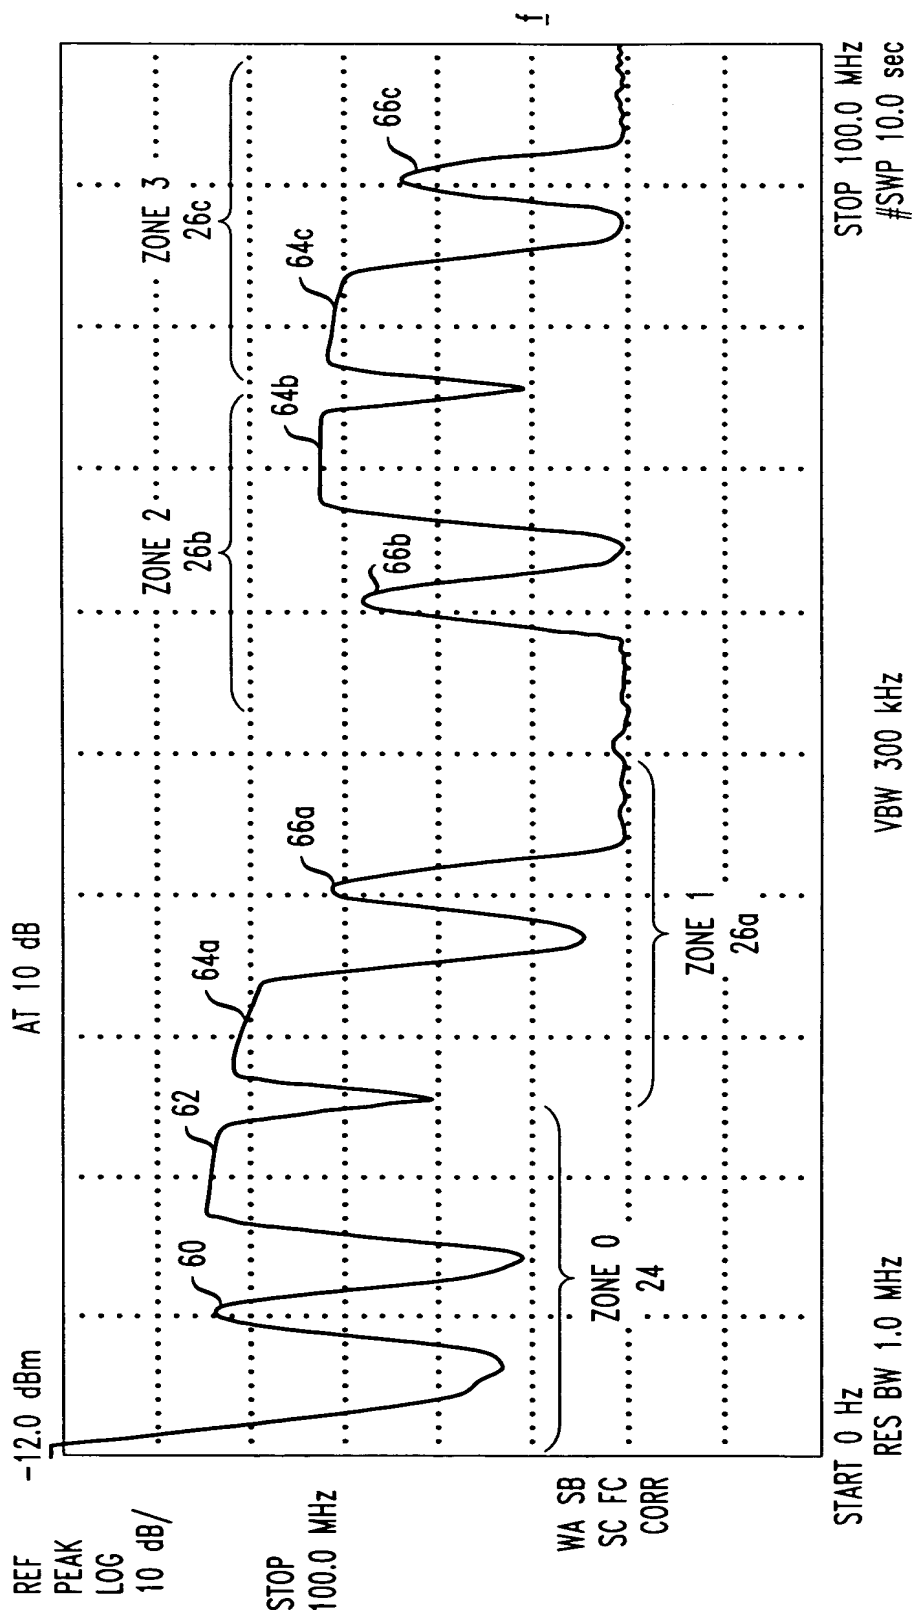




FIG. 6

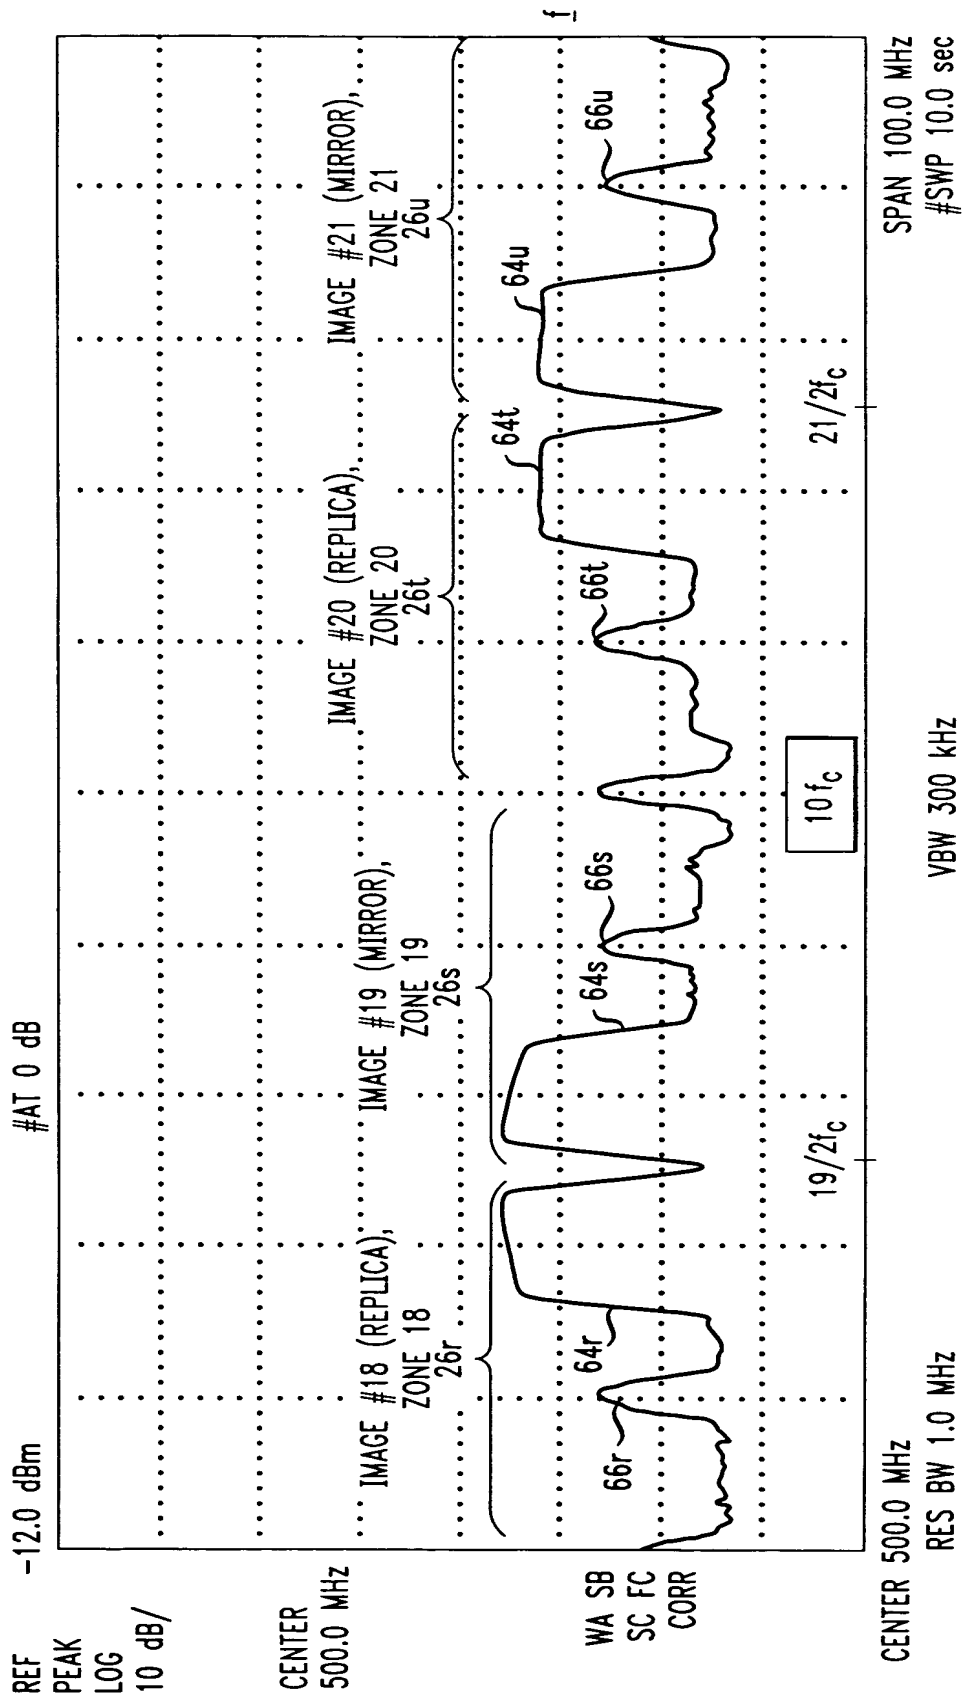




FIG. 7

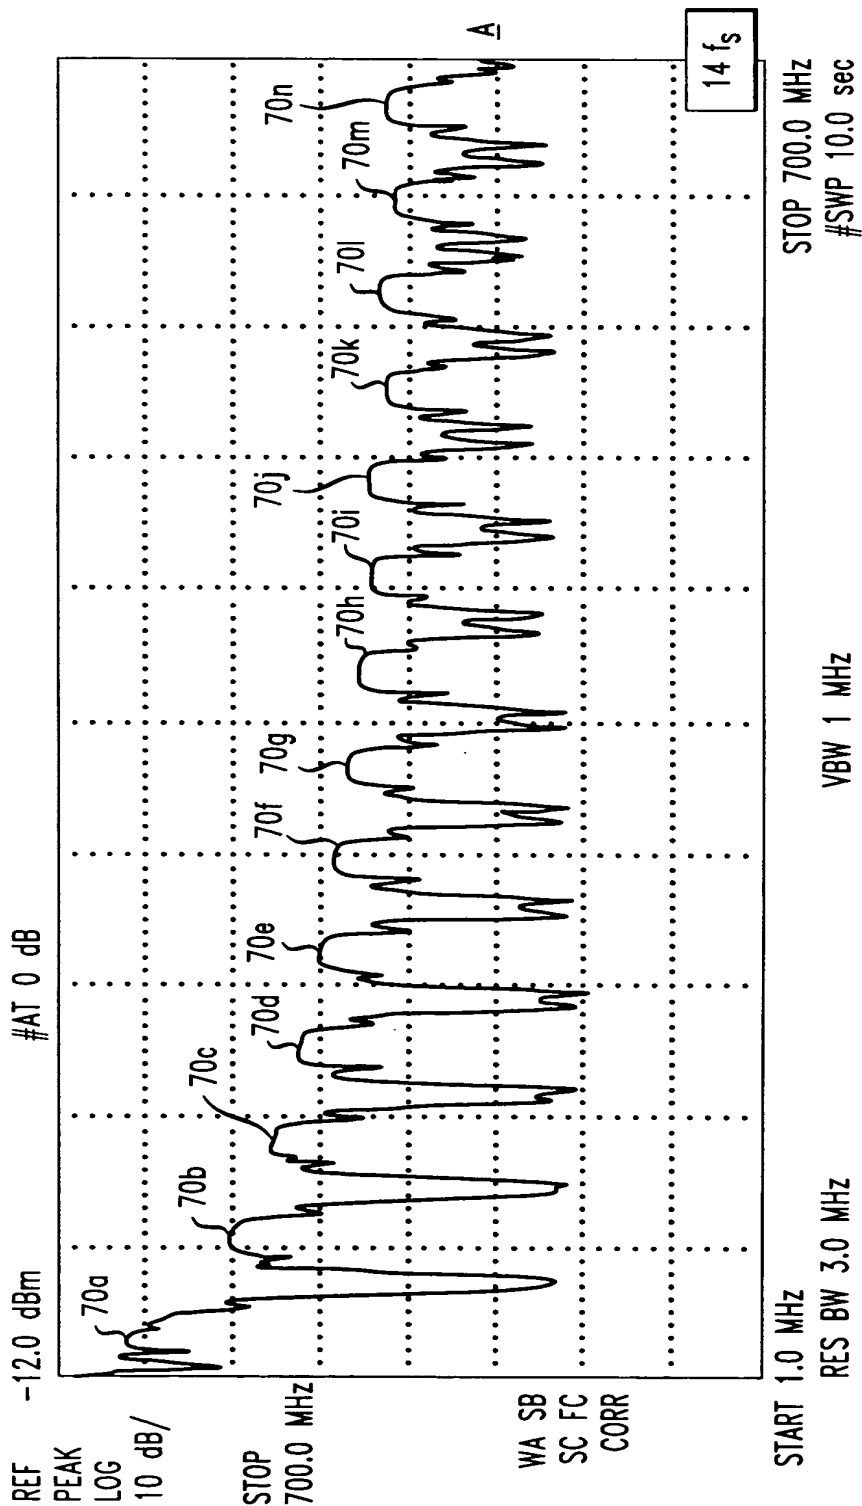




FIG. 8

